




SPARES for ROYAL ENFIELD & AMAL

**HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY ENGLAND**

EMAIL: info@hitchcocksmotorcycles.com
WEB: www.hitchcocksmotorcycles.com

TELEPHONE: 01564 783 192
FAX: 01564 783 313

GP Seat Fitting Instructions – 91485

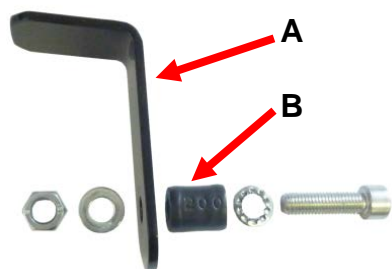


1. Front attachment bracket (A) components.



2. Front attachment bracket assembled ready for mounting onto frame top tube.



3. Front attachment bracket (A) is inserted into frame top tube (arrow) and secured by an expanding rubber bush (B).

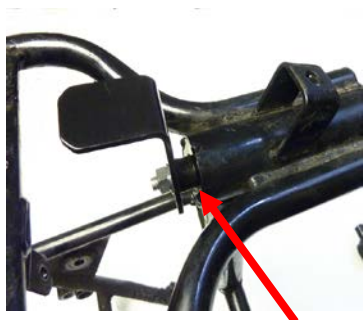

4. Push the rubber bush fully into the top frame tube and turn the nut to expand the bush.



5. Tighten the nut so that the rubber bush expands until the bracket is held firmly in place.



6. The front bracket should now sit like this.



7. Attach rear seat bracket to the rear shock absorber bolts as arrowed.



8. Fit seat by pushing front seat bracket onto front frame bracket (A) and move rear bracket until the seat bolts fit into bracket holes (arrowed). Push seat fully forward and tighten all bolts.



9. Front seat bracket (C) hooks under the front attachment bracket (A) like this.




SPARES for ROYAL ENFIELD & AMAL

EMAIL: info@hitchcocksmotorcycles.com
WEB: www.hitchcocksmotorcycles.com

HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY **ENGLAND**

TELEPHONE: 01564 783 192
FAX: 01564 783 313

Number plate and tail light fitting

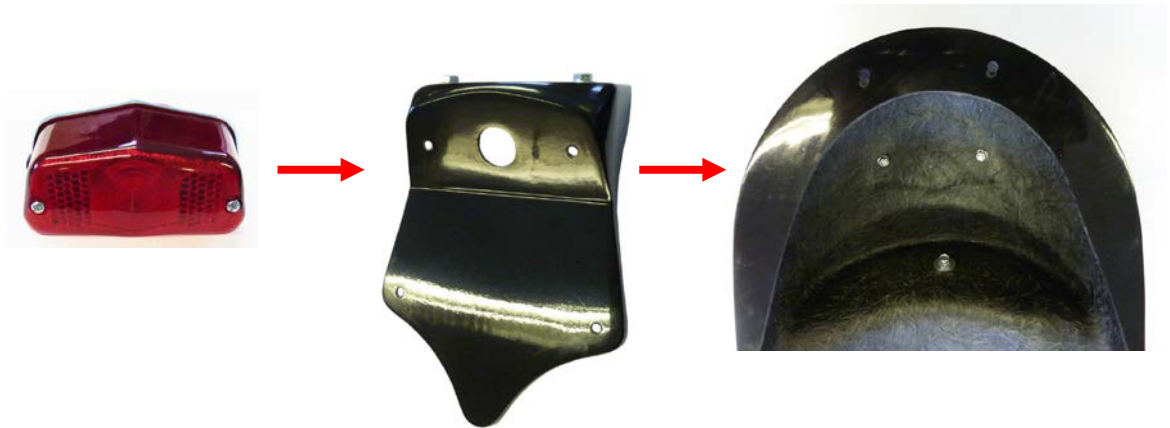

Assembled Seat

