



SPARES for ROYAL ENFIELD & AMAL


EMAIL: info@hitchcocksmotorcycles.com
WEB: www.hitchcocksmotorcycles.com

HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY ENGLAND

TELEPHONE: 01564 783 192
FAX: 01564 783 313

Fitting Guide for 93179, Rear Luggage Carrier – For use with a GT Continental 535 Fitted with a Dual Seat

Together with the rear carrier these are the fixing items you will have received

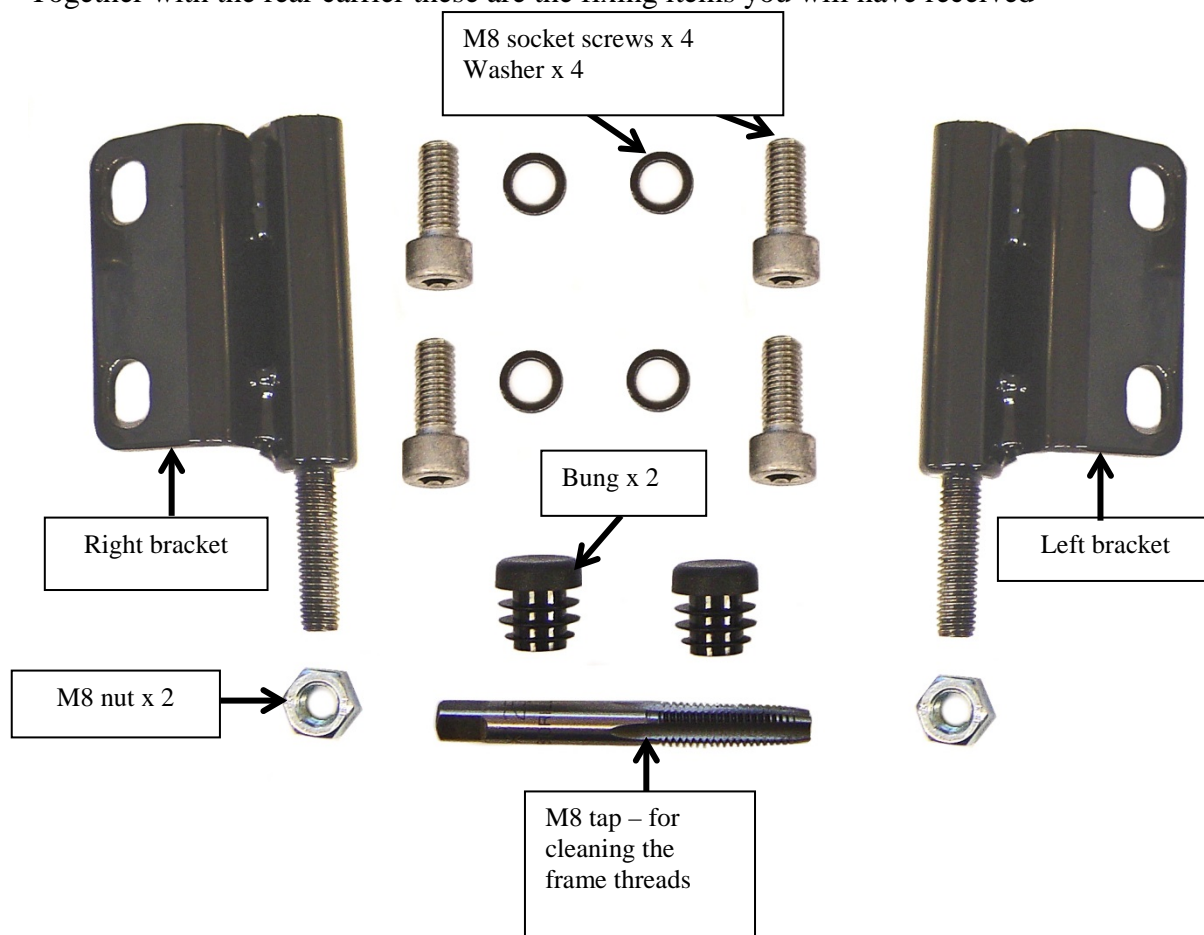

1. Remove seat
2. Tap 8mm threads in frame – simply to 'clean' the threads as they may contain some paint [B in picture]
3. Remove 8mm bolts from either side of rear light [A in picture]
4. Fit bungs into right and left brackets. Loosely screw these two brackets to either side of carrier [B in picture]
5. Position carrier and refit the two 8mm bolts either side of the rear light – do not tighten at this stage [A in picture]



SPARES for ROYAL ENFIELD & AMAL

EMAIL: info@hitchcocksmotorcycles.com

WEB: www.hitchcocksmotorcycles.com

**HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY ENGLAND**

TELEPHONE: 01564 783 192

FAX: 01564 783 313

6. Tip carrier forward to allow the right and left bracket to be screwed in or out so slots in the brackets align with the tapped 8mm threaded holes in the frame [C in picture]
7. Loosely screw the four M8 socket screws with their washers into the threaded holes in the frame [B in picture]
8. Level the carrier and fully tighten the bolts on either side of the rear light [A in picture]
9. Tighten the four M8 socket screws that secure the right and left brackets [B in picture]
10. Tighten the two M8 nuts on the threads of the right and left brackets [C in picture]
11. Replace seat

