



SPARES for ROYAL ENFIELD & AMAL

EMAIL: info@hitchcocksmotorcycles.com

WEB: www.hitchcocksmotorcycles.com

**HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY ENGLAND**

TELEPHONE: 01564 783 192

FAX: 01564 783 313


93580 ALLOY TRIALS TANK – FITTING INSTRUCTIONS

Remove the existing tank (front and rear fixings).

Remove the front rubber/tube fixing from the frame.

Insert the new front fixing and push on the larger rubber supports from each side.

Rear Tank fixing assembly

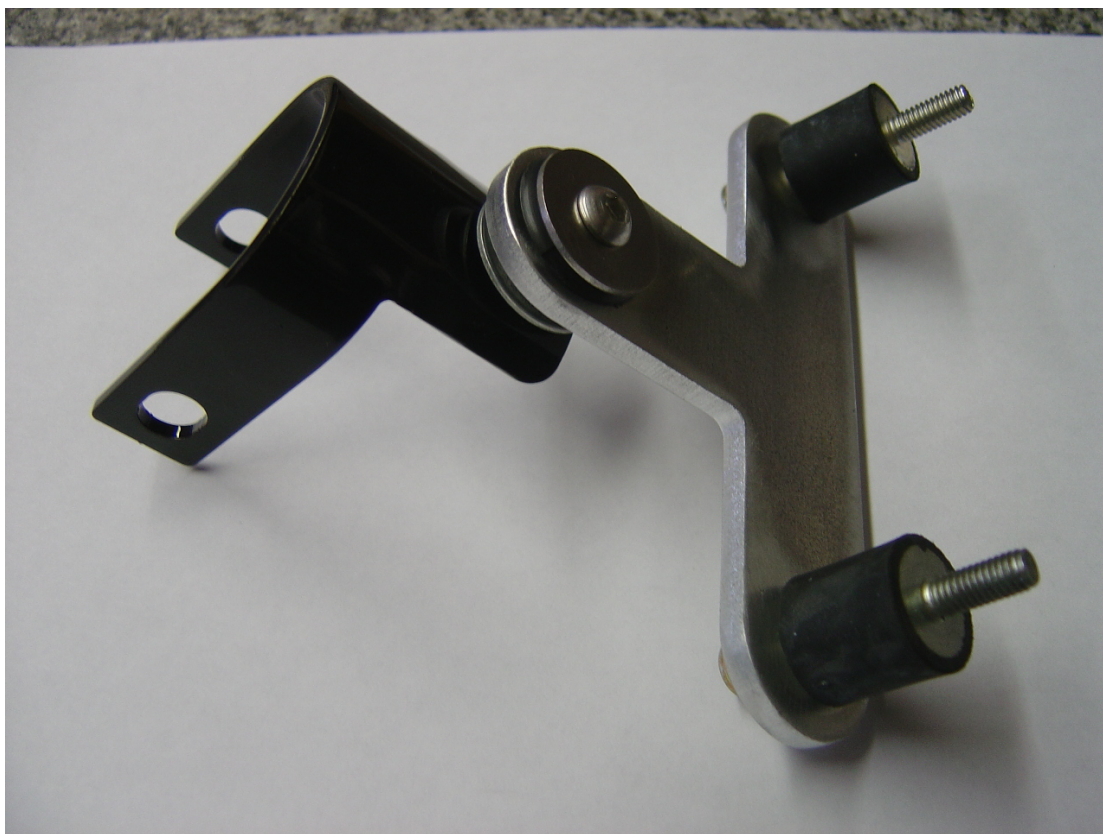

Screw the 2 bobbins to the rear underside of the alloy tank (using some thread lock may help any future dismantling of the support bracket)

Insert the grommet into the rear of the flat 'T' piece and attach the "T" piece to the bobbins using the nyloc nuts.

Loosely attach the saddle bracket to the original tank rear frame mounts.

Gently lower the tank onto the front fixings (take extra care with the wiring near the headstock and remember the tank is easily dented!). Once in position lower the rear of the tank onto the saddle bracket using the two washers provided to sandwich the grommet. Tighten all of the rear fixings.