



SPARES for ROYAL ENFIELD & AMAL

EMAIL: info@hitchcocksmotorcycles.com

WEB: www.hitchcocksmotorcycles.com

HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY ENGLAND

TELEPHONE: 01564 783 192


FAX: 01564 783 313

200084 Frame bracket (Single Seats)

Our single seats excluding the scramble seat and dual seats (where indicated) require a bracket on the top frame tube (arrowed). Some early 1990s frames do not have this.

If you are missing this bracket on your frame, our specially made bracket solves this problem. It fixes securely to the frame and only requires one 5mm hole to be drilled in the top of the frame.

The bracket is secured to the top of the frame by means of a self tapping screw and at the end of the top tube with a bolt see photos.

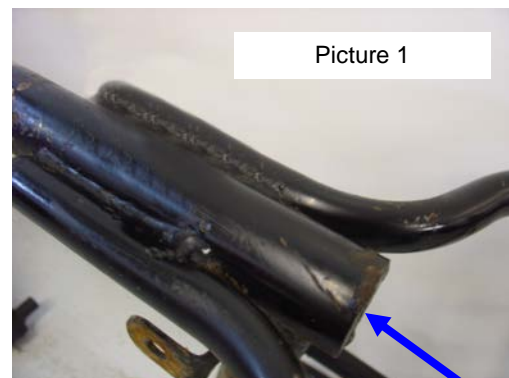


Rubber tube slides in hole in frame here

Self tapping screw



Securing bolt

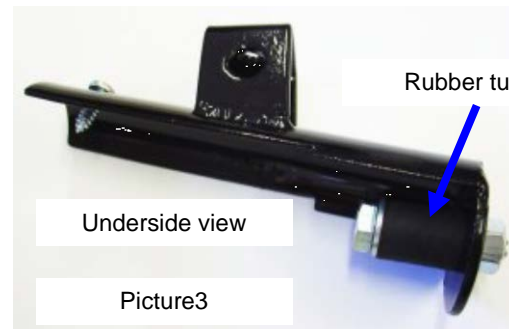

Rubber tube

Remove the self tapping screw, but with the securing bolt, rubber tube, washers and nut still intact (through the bracket as shown in picture 3) slide into the end of the hole in the frame shown in Picture 1 as far as it will go. The bracket should sit square and close against the end of the frame tube. Start tightening the bolt. It will cause the rubber tube which is now inside the top frame tube, to expand. Now use a 5mm drill to create a hole in the frame for the self tapping screw at the front of the bracket and fit and tighten the screw. Finish tightening the securing bolt. Job done!