



SPARES for ROYAL ENFIELD & AMAL

EMAIL: info@hitchcocksmotorcycles.com

WEB: www.hitchcocksmotorcycles.com

HITCHCOCK'S MOTORCYCLES LTD
ROSEMARY COURT
OLDWICH LANE WEST
CHADWICK END
SOLIHULL
B93 0EY ENGLAND


TELEPHONE: 01564 783 192

FAX: 01564 783 313

Revised: 30 October 2019


TOOLBOX LOCKS

TOP

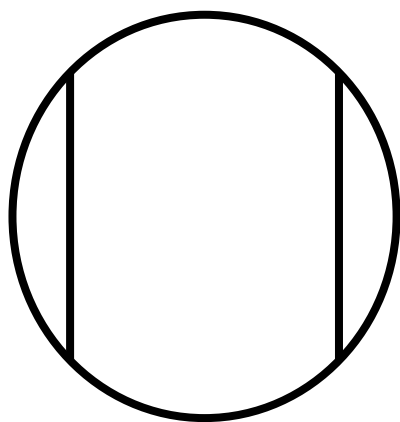

A

TOP

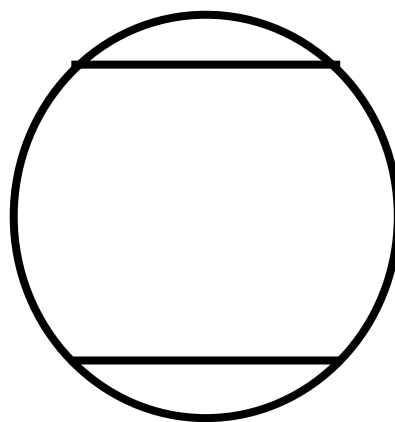

B

On late model Bullets (approx. mid 90's – On) the toolbox lids have vertical flats (see Pic A). These are used to position the lock so that when the key is turned, the locking arm locates behind a boss on the inside of the toolbox, locking the lid in position.

Earlier models (approx. 1988 – mid 90's) have toolbox lids with horizontal flats (see Pic B). This means that when the key is turned the locking arm cannot locate behind the boss and so will not lock securely. **Note:** The original locks for this style of lid are no longer available.

To enable these locks to work with this style of toolbox lid you will need to file the flats off to create a round hole. The locks can then be rotated in the hole to a position where the locking arm can locate behind the boss in the toolbox, when in the locked position. If necessary, how tight the lids fits can be adjusted by 'tweaking' the locking arm.